



Stonetto Shower tray # 720150180000000 / 720150380000000 / 720150680000000

| < 1400 mm > |

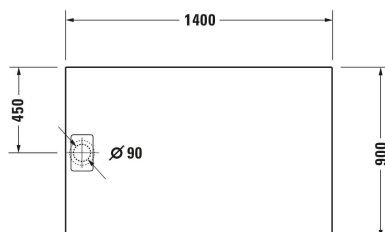

| Shower tray | Dimension | Weight | Order number |
|--|---------------|-----------|-----------------|
| Rectangular, Polymer cast, DuroCast UltraResist, Waste outlet position: Sidewise, Height: 50 mm | | | |
| Colors | | | |
| 18 Concrete 38 White 68 Anthracite | | | |
| Variant | | | |
| Concrete Matt | | 37.000 kg | 720150180000000 |
| White Matt | | 37.000 kg | 720150380000000 |
| Anthracite Matt | | 37.000 kg | 720150680000000 |
| Accessory for shower trays | | | |
| Support frame Suitable for series Stonetto, Height: 80-100 mm | 1400 x 900 mm | 10.588 kg | 791110 |
| Formwork support | 1300 x 230 mm | 1.5 kg | 792805 |
| Noise reduction set | 310 x 210 mm | 0.26 kg | 791372 |
| Outlet drain Outlet drain: vertical, Water trap height: 50 mm, Drainage capacity in accordance with DIN EN 274: 66 l/min, Diameter of drain hole: 90 mm | 100 x 100 mm | 0.5 kg | 790269 |
| Outlet drain Outlet drain: horizontal, Water trap height: 50 mm, Drainage capacity in accordance with DIN EN 274: 42 l/min, Diameter of drain hole: 90 mm | 300 x 90 mm | 0.5 kg | 790263 |
| Waterproofing set | 370 x 250 mm | 1.7 kg | 792803 |
| Shower tray foot Suitable for series Stonetto, Tempno, Height: 100-150 mm | 35 x 35 mm | 0.8 kg | 790173 |
| Outlet drain Outlet drain: horizontal, Water trap height: 50 mm, Drainage capacity in accordance with DIN EN 274: 0,6 l/min, Diameter of drain hole: 90 mm | 300 x 200 mm | 1.2 kg | 791243 |
| Tile flange | 3300 x 4 mm | 0.1 kg | 790126 |

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.