



SensoWash® Slim Shower toilet seat # 611000002000300 / **611000002304300 / 611000002500300**

| < 373 mm > |

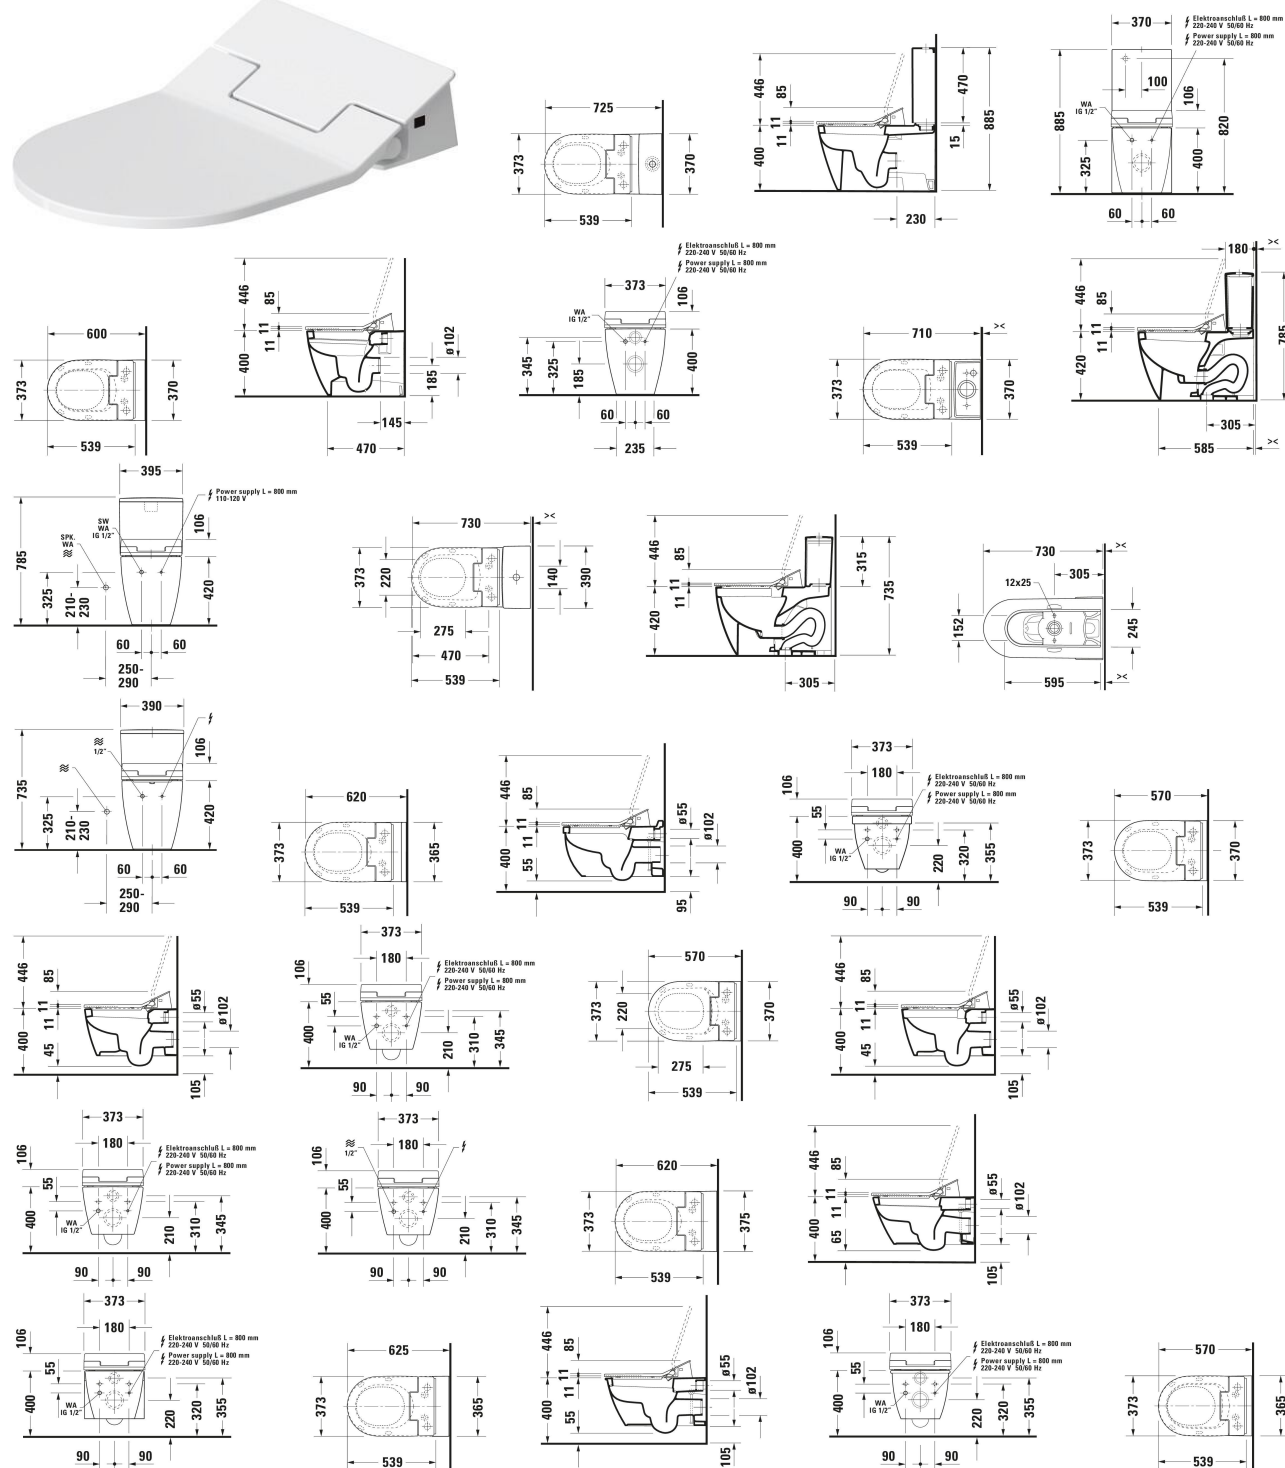

SensoWash® Slim Shower toilet seat # 611000002000300 / 611000002304300 / 611000002500300

|< 373 mm >|

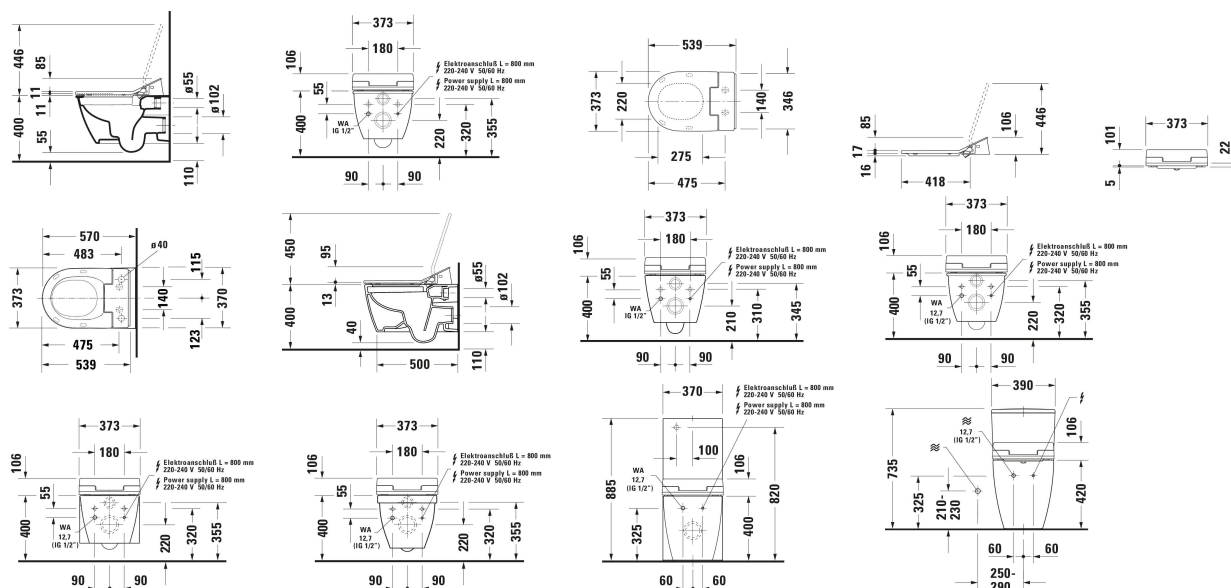

Shower toilet seat	Dimension	Weight	Order number
Suitable for series ME by Starck, Starck 2, Starck 3, DuraStyle, Bento Starck Box, White, Automatic close, Seat material type: Duroplast, Lid material type: Duroplast, Adjustable shower jet position level: 5 Steps, Controllable spray jet intensity steps: 3 Steps, Controllable spray jet temperature steps: 4 Steps, Adjustable shower jet position level: 5 Steps, Rearwash, Ladywash, Pulsing shower spray: Oscillating, Remote control, Controller, Self-cleaning shower nozzle/shower head, Decalcification function, Holiday mode, Night light, Protection type: IPX4			
Colors			
00 White Alpin			
Variant			
		5.950 kg	611000002000300
		5.500 kg	611000002304300
Seat material type: Thermoplastic, Lid material type: Thermoplastic, Seat heater, Energy saving mode: Adjustable		5.950 kg	611000002500300
Installation accessories			
Pre-installation set	135 x 105 mm	0.43 kg	005072
Vario Connector Set	260 x 220 mm	0.385 kg	100730
Vario Connector Set	220 x 260 mm	0.7 kg	100691
Suitable products			

SensoWash® Slim Shower toilet seat # 611000002000300 / 611000002304300 / 611000002500300

|< 373 mm >|

Toilet wall-mounted for shower toilet seat Flush water quantity: 4,5/3 l, Washdown model, Flushing rim: Closed, Outlet drain horizontal, Incl. invisible fixation, Incl. connecting set for SensoWash, Unified Water Label (UWL) Class: 1, 365 x 620 mm	365 x 620 mm	254459
Toilet wall-mounted for shower toilet seat Flush water quantity: 4,5/3 l, Washdown model, Flushing rim: Closed, Flush principle: washdown model, Outlet drain horizontal, Incl. invisible fixation, Incl. connecting set for SensoWash, Unified Water Label (UWL) Class: 1, 365 x 620 mm	365 x 620 mm	222659
Toilet wall-mounted for shower toilet seat Flush water quantity: 4,5/3 l, Washdown model, Flushing rim: Closed, Flush principle: washdown model, Outlet drain horizontal, Incl. invisible fixation, Incl. connecting set for SensoWash, Unified Water Label (UWL) Class: 1, 375 x 620 mm	375 x 620 mm	253359
Toilet wall-mounted for shower toilet seat Flush water quantity: 4,5/3 l, Washdown model, Flushing rim: Closed, Flush principle: washdown model, Outlet drain horizontal, Incl. invisible fixation, Incl. connecting set for SensoWash, Unified Water Label (UWL) Class: 1, 373 x 570 mm	373 x 570 mm	252859
Toilet wall-mounted for shower toilet seat Flush water quantity: 4,5/3 l, Washdown model, Flushing rim: Rimless, Incl. invisible fixation, Incl. connecting set for SensoWash, Unified Water Label (UWL) Class: 1,		252959
Toilet floorstanding for shower toilet seat Back to wall version, Flush water quantity: 4,5/3 l, Washdown model, Flushing rim: Closed, Outlet drain: horizontal, Position outlet: Back, Flush principle: washdown model, Incl. mounting material, Unified Water Label (UWL) Class: 1, 370 x 600 mm	370 x 600 mm	216959
Two piece toilet for shower toilet seat SensoWash Toilet, 710 mm, Elongated, Flush water quantity: 4,8/4,8 l, extractor/siphon jet, Flushing rim: Closed, Outlet drain vertical, 373 x 710 mm	373 x 710 mm	217151
One piece toilet for shower toilet seat SensoWash Toilet, 730 mm, Elongated, Flush water quantity: extractor/siphon jet, Flushing rim: Rimless, Outlet drain: vertical, Distance of rear panel/outlet: 305 mm, 390 x 730 mm	390 x 730 mm	217351
Toilet set wall-mounted Packaging dimensions: 580x655x475 mm, 373 x 570 mm	373 x 570 mm	631000
Toilet wall-mounted for shower toilet seat HygieneFlush Flush water quantity: 4,5/3 l, Washdown model, Flushing rim: Rimless, Flush principle: washdown model, Incl. invisible fixation, Incl. connecting set for SensoWash, Unified Water Label (UWL) Class: 1, 370 x 570 mm	370 x 570 mm	257959
Toilet set wall-mounted Packaging dimensions: 580x655x475 mm, 373 x 570 mm	373 x 570 mm	631002

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.