


DuraSystem® Mechanical actuator plate for WC A1 # WD5002012000

| < 230 mm > |

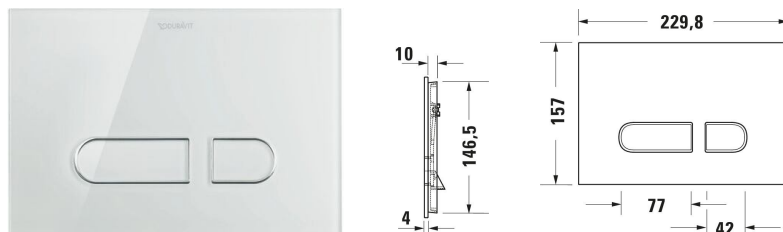

Mechanical actuator plate for WC A1	Dimension	Weight	Order number
Glass, Dual Flush, Flush operation technology: Manual, Type of installation: surface mounted, Flush-mounted, Incl. installation frame, Including mounting kit, Incl. push rod			
Colors			
00 White Alpin			
Variant			
		0.700 kg	WD5002012000
Suitable products			
Installation element dry installation for WC Standard 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards	500 x 155 mm	14.2 kg	WD1011
Installation element dry installation for WC Odour extraction, Fan activation: Manual, 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards	500 x 155 mm	17.5 kg	WD1012
Installation element wet installation for WC Type of installation: For walling in and out, Type of mounting: Wet installation, Max. projection toilet: 700 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow	445 x 153 mm	8.1 kg	WD1015
Installation element dry installation for WC Basic 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards	500 x 155 mm	16 kg	WD1020

DuraSystem® Mechanical actuator plate for WC A1 #
WD5002012000

|< 230 mm >|

*All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding.
Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.*