


DuraSystem® Installation element wet installation for WC # WD1015000000

| < 445 mm > |

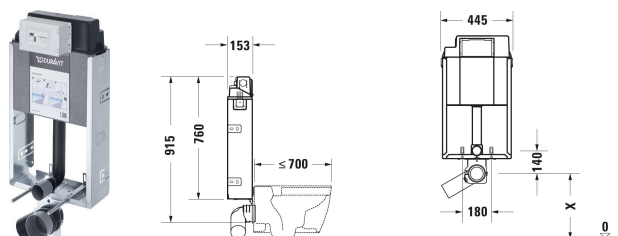

Installation element wet installation for WC	Dimension	Weight	Order number
Type of installation: For walling in and out, Type of mounting: Wet installation, Max. projection toilet: 700 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow			
Colors			
00 White Alpin			
Variant			
		8.100 kg	WD1015000000
Installation accessories			
Mechanical actuator plate for WC A1 Plastic, Dual Flush, Flush operation: Mechanical, Flush operation technology: Manual, Type of installation: surface mounted, Flush-mounted, Incl. installation frame, Including mounting kit, Incl. push rod	217 x 10 mm	0.3 kg	WD5001
Hygienic flush power supply, Protection type: IPX4	184 x 95 mm	0.3 kg	WD6002
Hygienic flush battery supply, Protection type: IPX4	184 x 95 mm	0.3 kg	WD6003
pre-installation kit	335 x 160 mm	0.4 kg	WD6004
Wall connection set for WC 365 mm, Elongated	365 x 180 mm	0.8 kg	WD6010
Mechanical actuator plate for WC A1 Glass, Dual Flush, Flush operation technology: Manual, Type of installation: surface mounted, Flush-mounted, Incl. installation frame, Including mounting kit, Incl. push rod	230 x 14 mm	0.7 kg	WD5002

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.