


**Faucet Accessories Shower arms # UV06700250.. /**  
**UV06700250.. / UV06700250.. / UV06700250.. / UV06700250.. /**  
**UV0670025C.. / UV0670025C..**

|< 65 mm >|

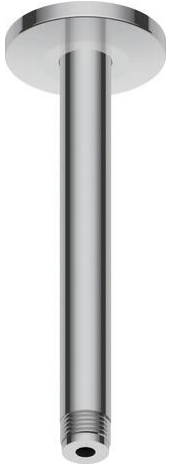

Shower arms	Dimension	Weight	Order number
Escutcheon shape: Round			
<b>Colors</b>			
04 Brushed Bronze 10 Chrome 34 Polished Gold 46 Black Matt 70 Brushed Stainless Steel			
<b>Variant</b>			
Type of mounting: Ceiling mount, Shower arm length: 200 mm, bronze Brushed		0.186 kg	UV06700250..
Type of mounting: Ceiling mount, Shower arm length: 200 mm, Chrome		0.180 kg	UV06700250..
Type of mounting: Ceiling mount, Shower arm length: 200 mm, Gold Polished		0.186 kg	UV06700250..
Type of mounting: Ceiling mount, Shower arm length: 200 mm, Black Matt		0.180 kg	UV06700250..
Type of mounting: Ceiling mount, Shower arm length: 200 mm, Stainless steel Brushed		0.186 kg	UV06700250..
Type of mounting: Ceiling mount, Shower arm length: 200 mm, Chrome		0.180 kg	UV0670025C..
Type of mounting: Ceiling mount, Shower arm length: 200 mm, Black Matt		0.180 kg	UV0670025C..
<b>Suitable accessories for Type of mounting: Ceiling mount, Shower arm length: 200 mm, Chrome</b>			
Single lever shower mixer for concealed installation Number of outlets: 2, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Showerhead, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts	170 x 86 mm	2.2 kg	B14210012

**Faucet Accessories Shower arms # UV06700250.. / UV06700250.. / UV06700250.. / UV06700250.. / UV0670025C.. / UV0670025C..**

| < 65 mm > |

Single lever shower mixer for concealed installation Number of outlets: 2, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Showerhead, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts	170 x 87 mm	2.15 kg	B24210012
Single lever shower mixer for concealed installation Number of outlets: 2, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Showerhead, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts	170 x 80 mm	2.1 kg	DE4210012
Single lever shower mixer for concealed installation Number of outlets: 2, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Showerhead, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts	170 x 97 mm	2.2 kg	WT4210012
Single lever mixer concealed set Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Tub filler, Hand shower, Outlet/Diverter: Diverter automatically reverts from hand shower to bath spout when turned off, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Including functional unit, Including trim parts	125 x 73 mm	1.58 kg	CE4210008
Single lever mixer concealed set Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Outlet/Diverter: Diverter automatically reverts from hand shower to bath spout when turned off, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Including functional unit, Including trim parts	125 x 89 mm	1.63 kg	WA4210008
Single lever mixer concealed set Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Outlet/Diverter: Diverter automatically reverts from hand shower to bath spout when turned off, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Square, 125x171 mm, Including functional unit, Including trim parts	125 x 76 mm	1.61 kg	MH4210008
Single lever shower mixer for concealed installation Number of outlets: 2, Chrome, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Showerhead, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts	170 x 86 mm	1.75 kg	N14210012
Single lever shower mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Showerhead, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round	170 x 82 mm	1.9 kg	CE4210012
<b>Suitable accessories for Type of mounting: Ceiling mount, Shower arm length: 200 mm, Chrome, Type of mounting: Ceiling mount, Shower arm length: 200 mm, Chrome</b>			

**Faucet Accessories Shower arms # UV06700250.. / UV06700250.. / UV06700250.. / UV06700250.. / UV0670025C.. / UV0670025C..**

|< 65 mm >|

Showerhead Plastic, Showerhead angle adjustable, Type of mounting: Ceiling mount, Wall installation, Dimensions of water supply connection: 1/2", Spray mode: Rain	100 x 100 mm	0.15 kg	UV0660022
Showerhead Stainless steel, Showerhead angle adjustable, Type of mounting: Ceiling mount, Wall installation, Dimensions of water supply connection: 1/2", Spray mode: Rain	200 x 200 mm	0.75 kg	UV0660019
Showerhead Stainless steel, Showerhead angle adjustable, Type of mounting: Ceiling mount, Wall installation, Dimensions of water supply connection: 1/2", Spray mode: Rain	400 x 400 mm	2.05 kg	UV0660021
Showerhead Stainless steel, Showerhead angle adjustable, Type of mounting: Ceiling mount, Wall installation, Dimensions of water supply connection: 1/2", Spray mode: Rain	200 x 200 mm	0.85 kg	UV0660030
<b>Suitable accessories for Type of mounting: Ceiling mount, Shower arm length: 200 mm, Chrome, Type of mounting: Ceiling mount, Shower arm length: 200 mm, Chrome, Type of mounting: Ceiling mount, Shower arm length: 200 mm, Black Matt</b>			
Showerhead Stainless steel, Showerhead angle adjustable, Type of mounting: Ceiling mount, Wall installation, Dimensions of water supply connection: 1/2", Spray mode: Rain	300 x 300 mm	1.5 kg	UV0660031
<b>Suitable accessories for Type of mounting: Ceiling mount, Shower arm length: 200 mm, Chrome, Type of mounting: Ceiling mount, Shower arm length: 200 mm, Chrome, Type of mounting: Ceiling mount, Shower arm length: 200 mm, Black Matt, Type of mounting: Ceiling mount, Shower arm length: 200 mm, Black Matt</b>			
Showerhead Plastic, Showerhead angle adjustable, Type of mounting: Ceiling mount, Wall installation, Dimensions of water supply connection: 1/2", Spray mode: Rain	230 x 230 mm	0.56 kg	UV0660017
Showerhead Plastic, Showerhead angle adjustable, Type of mounting: Ceiling mount, Wall installation, Dimensions of water supply connection: 1/2", Spray mode: Rain	250 x 250 mm	0.65 kg	UV0660018
Showerhead Stainless steel, Showerhead angle adjustable, Type of mounting: Ceiling mount, Wall installation, Dimensions of water supply connection: 1/2", Spray mode: Rain	300 x 300 mm	1.3 kg	UV0660020
Thermostatic shower mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Thermostat cartridge, Safety lock at 38 °C, Consumer selection: Hand shower, Showerhead, Outlet/Diverter: Shut-off and diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Flow rate (3 bar): 20,6 l/min, Escutcheon shape: Square, Including functional unit, Including trim parts	150 x 94 mm	1.8 kg	C14200013
Thermostatic shower mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Thermostat cartridge, Safety lock at 38 °C, Consumer selection: Hand shower, Showerhead, Outlet/Diverter: Shut-off and diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Flow rate (3 bar): 20,6 l/min, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts	170 x 94 mm	1.8 kg	C14200014
Single lever shower mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Showerhead, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Square, Including functional unit, Including trim parts	150 x 77 mm	1.88 kg	C14210011

**Faucet Accessories Shower arms # UV06700250.. / UV06700250.. / UV06700250.. / UV06700250.. / UV0670025C.. / UV0670025C..**

| < 65 mm > |

Single lever shower mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Showerhead, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Diameter escutcheon: 170 mm, Including functional unit, Including trim parts	170 x 77 mm	1.9 kg	C14210012
Single lever shower mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Showerhead, Hand shower, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Including functional unit, Including trim parts	170 x 86 mm	2.2 kg	TU4210012
Single lever shower mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Hand shower, Showerhead, Outlet/Diverter: Shut-off and diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Square, Including functional unit, Including trim parts	150 x 82 mm	2.15 kg	MH4210012
Single lever shower mixer for concealed installation Number of outlets: 2, Connection type for water supply connection: Basic Set, Ceramic cartridge, Consumer selection: Showerhead, Hand shower, Outlet/Diverter: Diverter valve, Number of outlets: 2, recommended operating pressure: 1 - 5 bar, Escutcheon shape: Round, Including functional unit, Including trim parts	170 x 92 mm	2.2 kg	WA4210012
<b>Suitable accessories for Type of mounting: Ceiling mount, Shower arm length: 200 mm, Chrome, Type of mounting: Ceiling mount, Shower arm length: 200 mm, Black Matt, Type of mounting: Ceiling mount, Shower arm length: 200 mm, Stainless steel Brushed, Type of mounting: Ceiling mount, Shower arm length: 200 mm, Gold Polished, Type of mounting: Ceiling mount, Shower arm length: 200 mm, bronze Brushed</b>			
Showerhead Plastic, Showerhead angle adjustable, MinusFlow, Type of mounting: Ceiling mount, Wall installation, Spray mode: Rain	230 x 230 mm	0.56 kg	UV0662017
Showerhead Plastic, Showerhead angle adjustable, MinusFlow, Type of mounting: Ceiling mount, Wall installation, Spray mode: Rain	250 x 250 mm	0.65 kg	UV0662018
Shower arms Escutcheon shape: Square	65 x 410 mm	0.232 kg	UV0670037
Shower arms Escutcheon shape: Square	65 x 210 mm	0.146 kg	UV0670036
Shower arms Escutcheon shape: Round	65 x 410 mm	0.23 kg	UV0670028
Shower arms Escutcheon shape: Round	65 x 210 mm	0.15 kg	UV0670027
Shower arms Escutcheon shape: Round	65 x 300 mm	0.154 kg	UV0670026
Shower arms Escutcheon shape: Round	65 x 200 mm	0.18 kg	UV0670025

*All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.*

Faucet Accessories Shower arms # UV06700250.. /  
 UV06700250.. / UV06700250.. / UV06700250.. / UV06700250..  
 UV0670025C.. / UV0670025C..

| < 65 mm > |

